Broadband Waveguide Combiner/Divider Waveguide Combiners/Dividers in a choice of configuration high power capacity, low insertion -excellent output isolationApplication Phased array radar, missile g antenna and power synthesis system - OtherTechnical Specifications： Operation frequency 1~40 GH >15% Power ratio 1～10:1 VSWR: 1.5 Standard, 1.2Available output isolation >20dBMechanical Spec Al/Cu Size (mm) 36*77*35Enviromental Specifations： Operating Temperature -55~+85℃

Types：

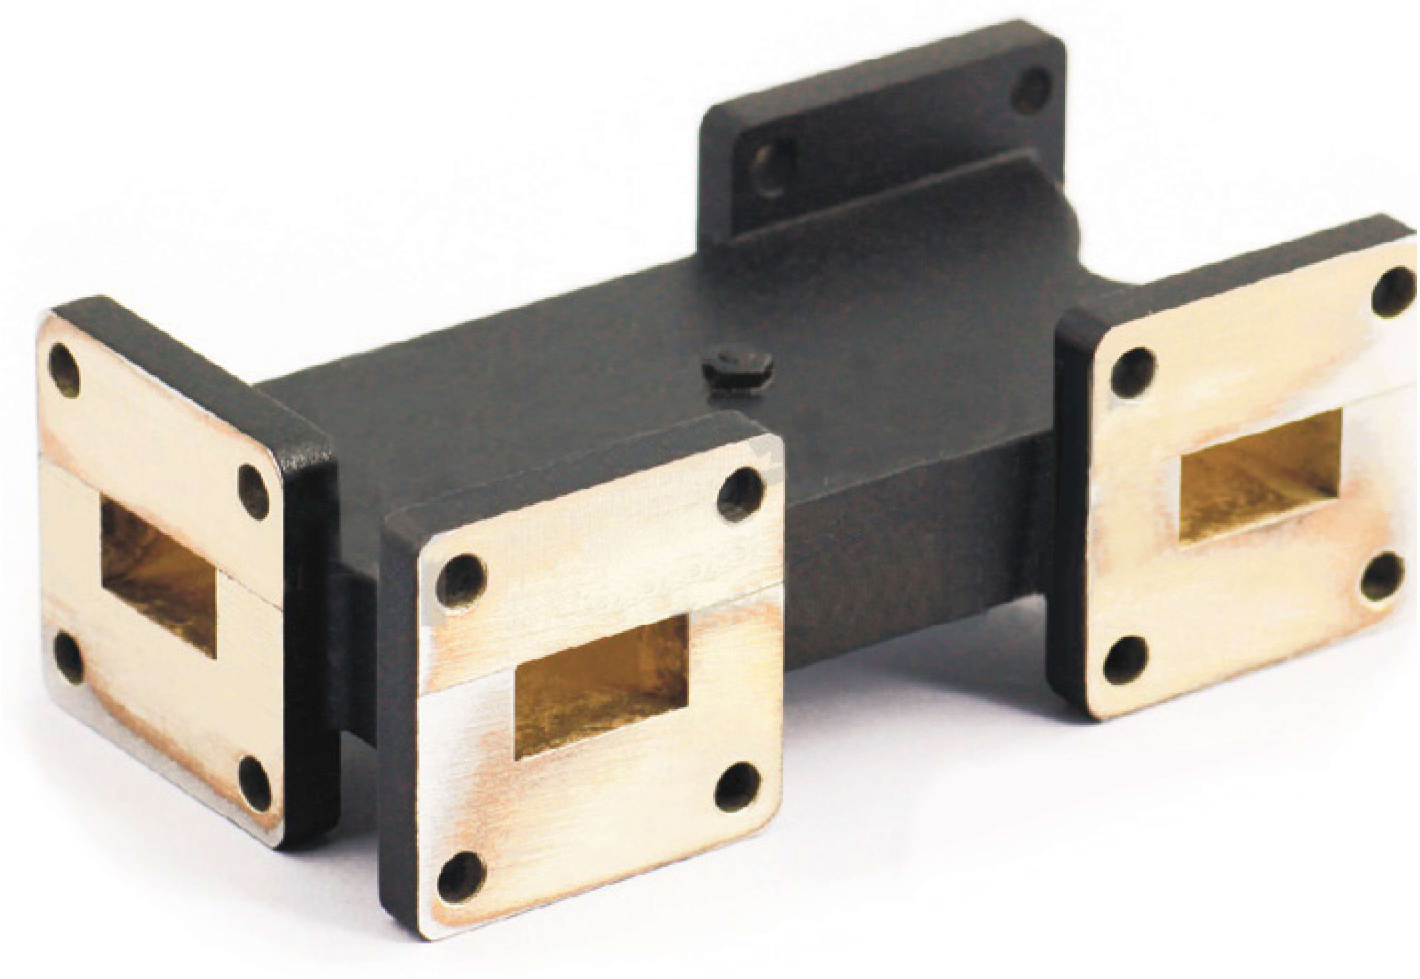

Outline Drawing：
Model List：

Test curve：

Note：
Other values and sizes can be designed to your requirement. Please call us with your specification an one of our design engineers.



SatelliteDish.com ® **(954) 941-8883**